

CURTAIN CONTROLLER



UNLOCK BETTER PERFORMANCE

GEAR UP FOR
**POWERFUL
 PERFORMANCE**

Protect the health of your pigs with a properly controlled curtain system. AP's curtain controllers deliver powerful performance and reliable operation to withstand rigorous environments.



Curtain Controller Dimensions

LENGTH	"A" TRAVEL	"B" WIDTH	"C" LENGTH	"D" WIDTH LESS FLANGE	WEIGHT
24" (61 cm)	22" (55.9 cm)	10.2" (25.9 cm)	52" (132.1 cm)	9.5" (24.1 cm)	110 lbs. (49.9 kg.)
36" (91.4 cm)	34" (86.4 cm)	10.2" (25.9 cm)	64" (162.6 cm)	9.5" (24.1 cm)	130 lbs. (58.9 kg.)
48" (121.9 cm)	46" (116.8 cm)	10.2" (25.9 cm)	76" (193 cm)	9.5" (24.1 cm)	150 lbs. (68.0 kg.)
60" (152.4 cm)	58" (147.3 cm)	10.2" (25.9 cm)	88" (223.5 cm)	9.5" (24.1 cm)	160 lbs. (72.6 kg.)

Specifications are subject to change without notice.

SCREW DRIVEN

A threaded block and drive screw are directly coupled to a direct drive gear motor and feature a heavy duty 15, 30 or 60 RPM motor. Multi-directional, frame mounted, header pulleys are standard.

HEAVY-DUTY DRIVE BLOCK


A removable nylon insert in the drive block assembly decreases friction and provides wear characteristics superior to conventional brass drive blocks. UHMW polyethylene guide wheels insure smooth travel, proper alignment and stability.

LATCH-OUT SWITCH

Optional latch-out switch kits are available. Simple to install and adjust, with a maximum load rating of 10 amps/240 volts.

AUTO-AIR ACTUATOR

The Auto-Air Actuator gives precise control of automated air inlets or chimneys. Controllers and Auto-Air Actuator work together to adjust to the correct air inlet position for all stages of ventilation providing optimum environmental control.

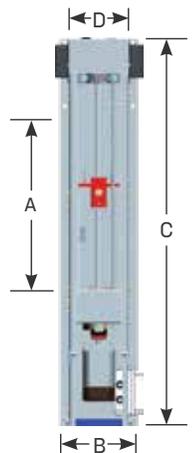

Contact your AP representative or visit automatedproduction.com for more information.